

**TRANSFER LABEL**

**Patent number:** JP2003508259T

**Publication date:** 2003-03-04

**Inventor:**

**Applicant:**

**Classification:**






**- international:** **B44C1/165; B32B27/20; B44C1/17; G09F3/02; B44C1/165; B32B27/20; B44C1/17; G09F3/02; (IPC1-7): B44C1/165; B32B27/20; G09F3/02**

**- european:** B44C1/17F2

**Application number:** JP20010520305T 20000824

**Priority number(s):** EP19990202789 19990827; WO2000NL00584 20000824

**Also published as:**

 WO0115915 (A1)  
 US6942912 (B1)  
 MXPA02002033 (A)  
 CA2383692 (A1)  
 HU224455 (B1)


more >>

**Report a data error here**

Abstract not available for JP2003508259T

Abstract of correspondent: **WO0115915**

The invention is directed to a transfer label material for image transfer, comprising a backing carrier material and a transfer layer, said transfer layer at least comprising an image layer, an adhesive layer and a pigmented layer between the adhesive layer and the image layer, said pigmented layer comprising a binder material, at least one white pigment and at least 0.1 wt.%, calculated on the basis of the pigmented layer, of aluminium powder (dry weight).

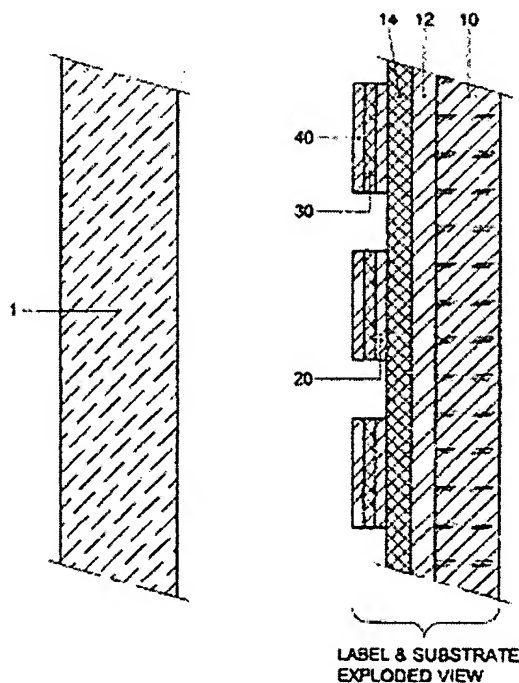

Data supplied from the **esp@cenet** database - Worldwide